

**EMERGENCY PROCEDURES FOR ROCKET SAFETY
GALAXY RECOVERY BALLISTIC PARACHUTE SYSTEM.**

FOR EMERGENCY INFORMATION

www.galaxysky.cz


OR CALL 1.501.228.7777 IN THE USA

First! Call 911 and report the accident. Proceed only if the loss of life is imminent.

1. Stored next to the rocket engine is a SAFETY PIN (red flag attached) with which to secure the rocket.



2. Remove the pin from the velcro attachment and follow the directions in the next photographs.

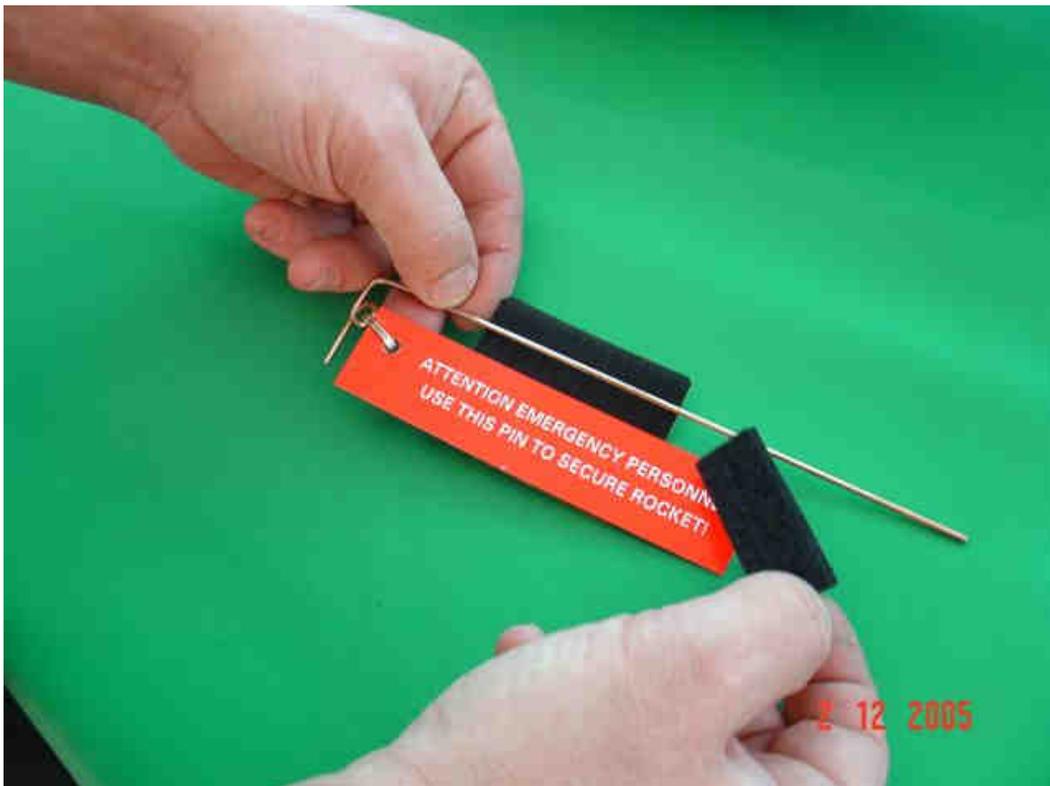

3. Place the end of the pin into the hole inside the silver colored launch tube. This hole has a RED outline and is about half-way up the exposed portion of the rocket and can be seen from either side of the rocket. The pin **MUST** go completely through the rocket motor and out the other side, or the rocket is not secure!.




4. The pin can be inserted from either direction but must go completely through the rocket engine and housing.



5. Bend the tip of the pin to prevent it from being removed from the rocket.



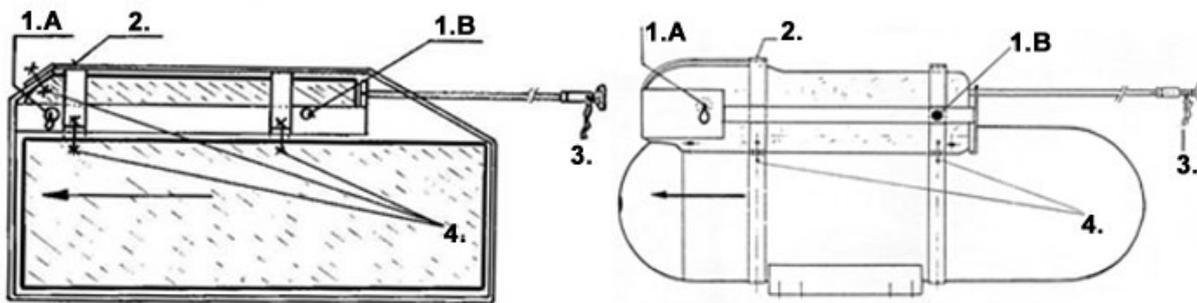

1. Transport saf1. Safety **A-** of steel wire diameter 2 mm, **B M5 bolt**.
2. Transport steel basket.
3. Operational safety pin with little flag.
4. Transport screws 2 x M5.

You must get updated advice from the factory before shipping.

PŘED EXPEDICÍ NÁS PROSÍM KONTAKTUJTE !

Avant l'achat merci de nous contacter!

SZÁLLÍTÁS ELŐTT ÉRTESÍTSE A GYÁRTÓT!

PRIMA DELLA SPEDIZIONE CONTATTATECI!

Przed wysłaniem systemu skontaktuj się z producentem aby uzyskać najnowsze informacje.

Warning!

Achtung!

Attention!

Pozor!

Transport safety snip **A**, unscrew **B** and draw after the system instalation.

Sicherungsstahldraht - durchschneiden **A**, ausschrauben **B** und nach der Montage des Systems herausziehen.

Les sécurités de transport **A** et la vis **B** ne doivent être retirées qu'après l'installation.

Odšroubuj šroub **B** po vyjmutí z obalu. Zajišťovací jehlu **A** přestřihni a vytáhni po instalaci systému.

GRS ROCKET BAM Nr. 1885/08

- WELDING WIRE
- SCHWEISSDRAHT
- FIL à SOUDER
- DRÁT-POJISTKA



Ø 1,5 - 2 mm

WARNING !
SECURE FOR SHIPPING

ACHTUNG !
TRANSPORTSICHERUNG

ATTENTION !
SÉCURITÉ POUR LE TRANSPORT

POZOR !
ZAJISTI PRO PŘEPRAVU

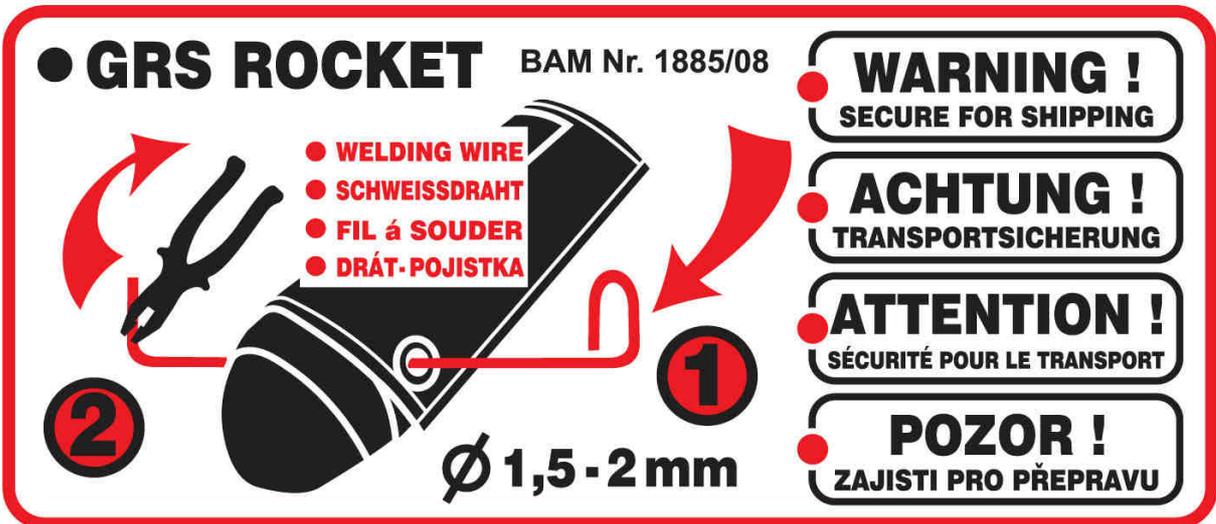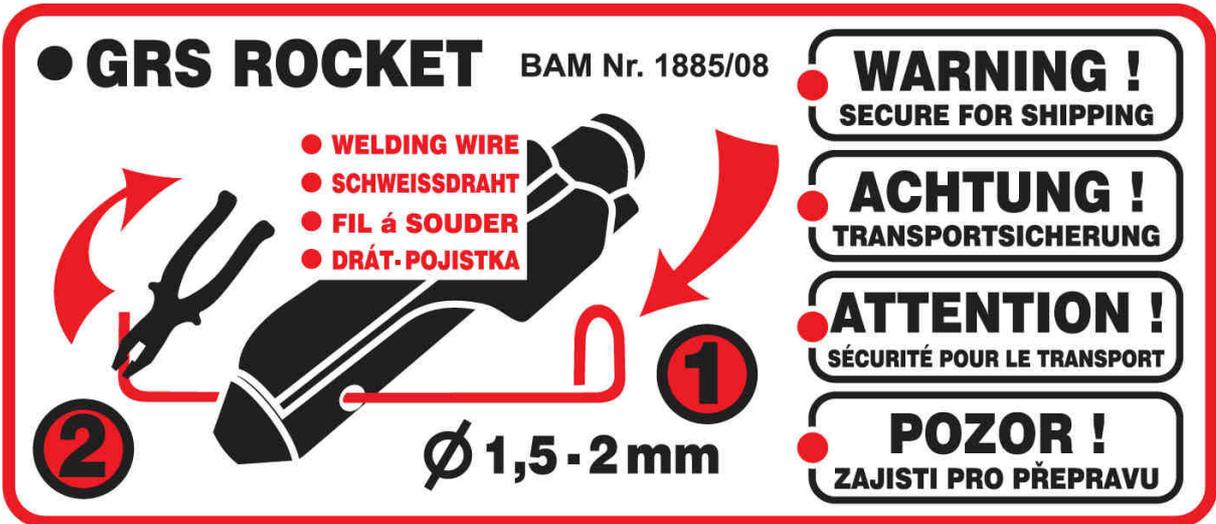

NOTICE: Be extremely careful if the rocket has been dislodged from it's mounting.
DO NOT PULL OR ROTATE THE ROCKET TO INSERT THE PIN!

The activation levers or cable may have been partially extended and the firing pins may not be secure.

After the rocket is secured and removed from the aircraft by a trained pyrotechic individual, it may be stored nose down in a small hole dug in the ground. The trained pyrotechic individual may also render it inert by removing the red plastic cover over the rocket engine exhaust, breaking through the thin brass membrane covering the exhaust exit port and pouring water into the exhaust port. Within thirty (30) minutes after propellant saturation by water the rocket should be safe for removal.